




wireless doorphone

LOGISTY

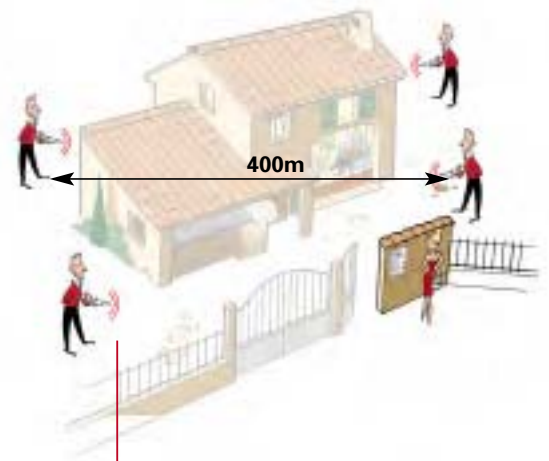

More functions

The LOGISTY wire free intercom is very much more than a classic intercom. It not only permits you to welcome the visitor at the door or gate, but also to open it remotely... at the touch of a button.

And when you open the door or gate to a friend at night, the LOGISTY wireless intercom can also transmit a remote command to switch on an outside light to illuminate the entranceway.

More freedom

Thanks to radio technology, LOGISTY has created an intercom with a cordless handset. You can place it anywhere in the house, and can also carry it with you anywhere: you can answer the door or gate from the garden, check who it is and open it if you wish, wherever you are around the house.


You are free as air with the LOGISTY wireless intercom; free to be simply at home, answering callers from the comfort of your chair in the lounge, office, workshop or garden.



BENEFITS

More information

At a glance, your LOGISTY intercom reassures you by indicating that the doors and gates are properly closed. If one of them remains open, or is in the process of opening, an icon on the LCD handset display informs you and identifies it.

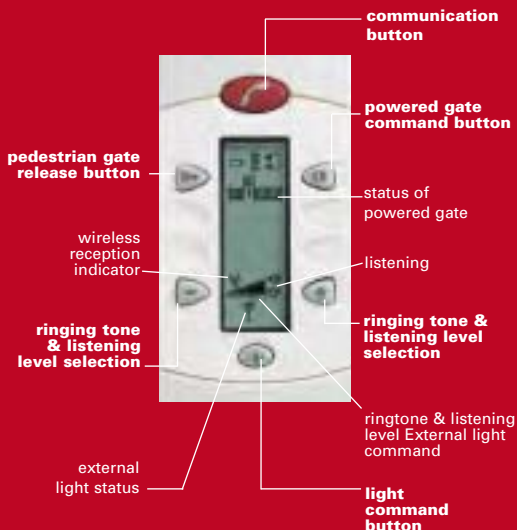

More technology

The LOGISTY wire-free intercom uses an ultra reliable 2-way radio link. Patented under the name of DynaPass®, this technology protects the system against interference and disruption and provides an assured high quality radio link between the external Caller Unit and the handset. Easier and quicker to install, plus more secure than a wired system from accidental damage as there is virtually no wiring to be damaged!

DynaPass® is a frequency agile radio technology: the radio receiver's integrated scanner continuously looks for the best available radio channels with the least interference. As soon as a channel is disrupted, the receiver moves on to another available channel.



Without labour, or damage



Without wiring, the LOGISTY intercom avoids all the heavy installation labour: no masonry to be drilled nor trenches to dig.

The installation of the external Caller Unit, as it is slim and surface mounted does not require excavating the door or gate post for flush fitting. The Controller also only requires very little installation time since no 230 VAC mains cable is required to power it, and there is no wiring to the internal handset.

The interior handset is completely wire-free: it can be placed almost anywhere in or around the house, and is completely mobile.





Power Supply


The Controller is normally powered by 4 alkaline batteries, that provide power for up to 4 years, due to its leading edge technology of ultra low current consumption.



The Controller

Connected to the Caller Unit, it establishes the radio link between outside the locked door or gate and the inside. The system has a maximum range of 400 ms in free field, and according to conditions of installation and the environment.

Typical operating range allowing for some intervening structures is approximately 150 metres.

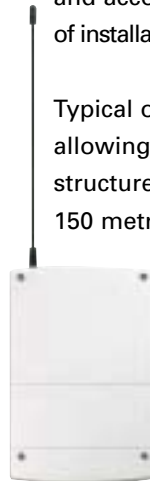


The Caller Unit

Placed next to the entrance door or gate, the Caller Unit exists in one and two button versions (for single or dual dwelling operation), and is also available with a keypad allowing an authorised user to open the controlled entrance from the outside, using an access code. Every Caller Unit has a ruggedised anti-vandal version.



*warranty 2 years, with free extension to 3 years on return of the completed warranty registration certificate within the 10 days of purchase.

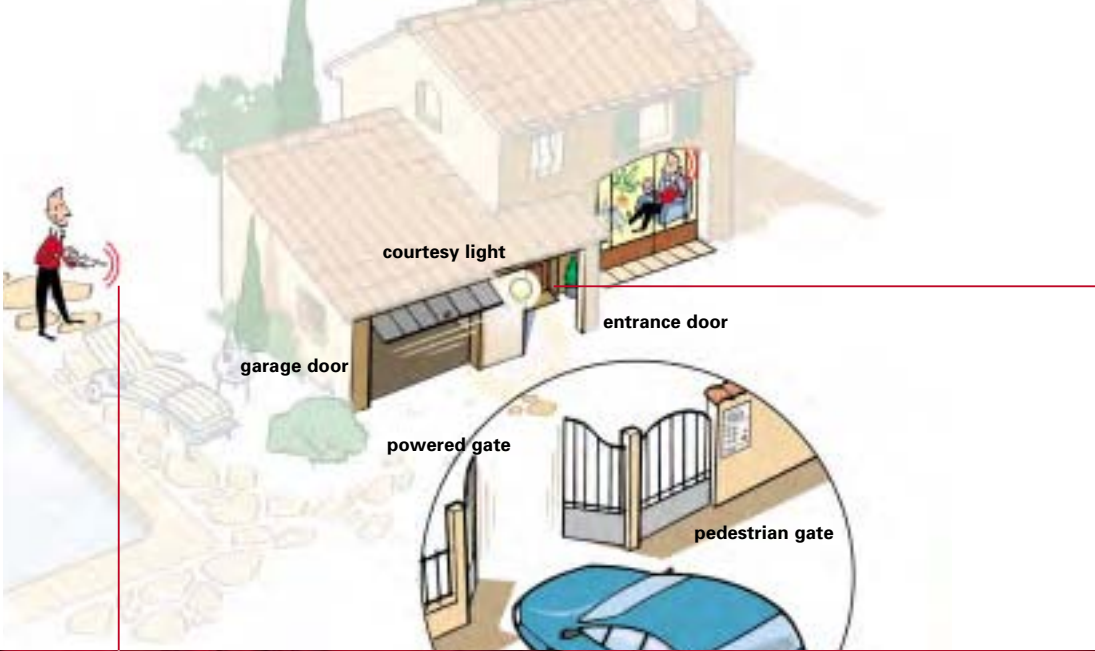

The L5300 switching receiver

Allows the handset to control courtesy lighting and powered garage doors (all types having a manual opening control).

SIMPLE TO OPERATE

The User Control

Is composed of 2 parts, the cordless handset, and the base unit which is for parking the handset and recharging its batteries.

Three versions are available:



Standard intercom:

Permits 2-way speech with a Controller, plus commands for 1 electromagnetic door or gate release.

Base unit & power supply:

Mains charger base with low volt ac power cord to 230 VAC plug-in charger.



3 function intercom:

Permits 2-way speech with a Controller, plus commands for:

- 1 electromagnetic door or gate release,
- 1 powered gate control,
- 1 courtesy light (requires L5300 receiver).

Choice of 2 types of base unit & power supply:

- Mains-free base housing alkaline batteries (autonomy 4 years),
- Mains charger base with low volt ac power cord to 230 VAC plug-in charger.




7 function intercom:

Permits 2-way speech with 2 Controllers plus their respective commands:

- Electromagnetic door or gate release at each Controller,
- Powered gate control at each Controller,
- 1 or 2 garage door control (requires L5300 switching receiver),
- 1 courtesy light (requires L5300 receiver).

The handset is powered by Li-Ion batteries which are recharged from alkaline batteries within the base unit (normal operational life of up to 4 years).

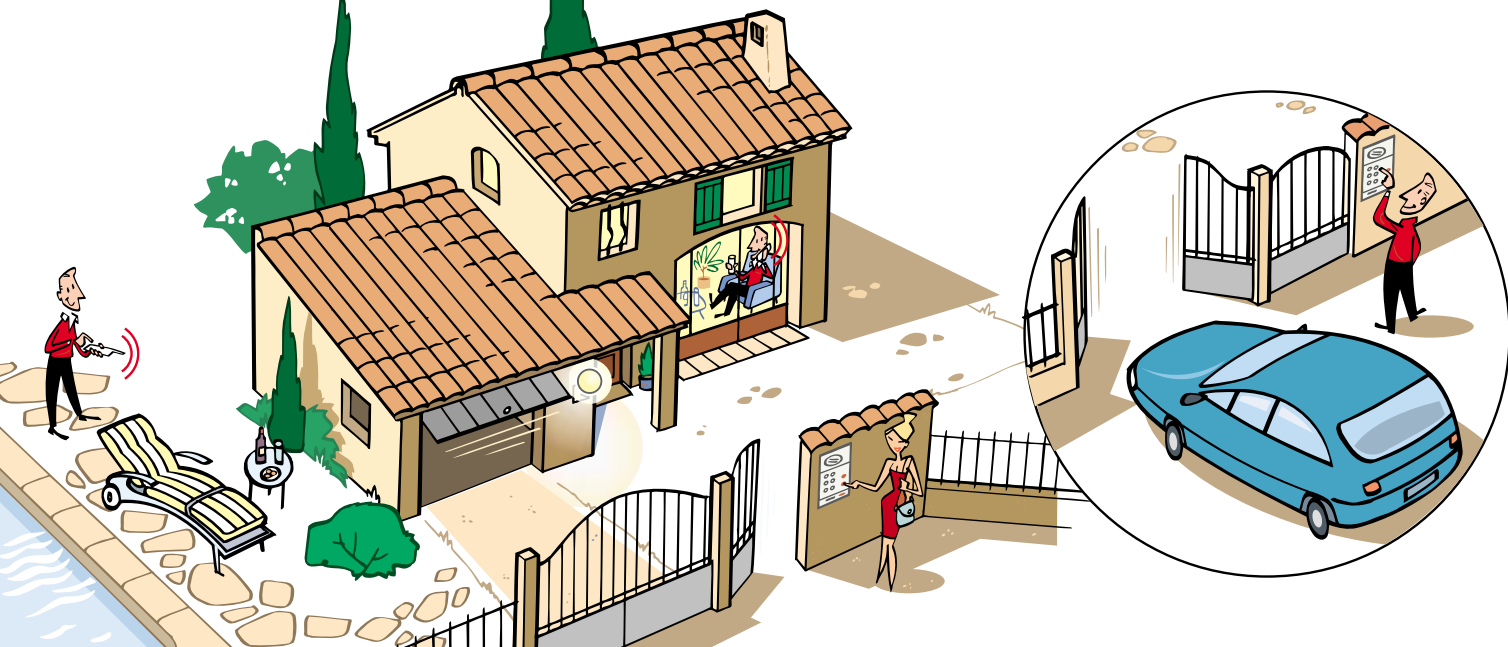

L5601GB: 3 x function intercom kit, single dwelling



- 1 Single button Caller Unit (ruggedised anti-vandal version),
- 1 Controller,
- 1 x 3 function handset with mains recharging base unit,
- Instructions + batteries + screws & fitting accessories.

L5721: 7 x function intercom kit, single dwelling



- 1 Single button Caller Unit with keypad (ruggedised anti-vandal version),
- Controller,
- 1 x 7 function handset with alkaline battery powered base unit,
- Instructions + batteries + screws & fitting accessories.

L5602GB: 3 x function intercom kit, 2 dwellings




- Dual button Caller Unit (ruggedised anti-vandal version),
- 1 Controller,
- 2 x 3 function handsets with mains recharger bases,
- Instructions + batteries + screws & fitting accessories.

L5722: 7 x function intercom kit, 2 dwellings



- Dual button Caller Unit with keypad (ruggedised anti-vandal version),
- 1 Controller,
- 2 x 7 function handsets with alkaline battery powered base units,
- Instructions + batteries + screws & fitting accessories.

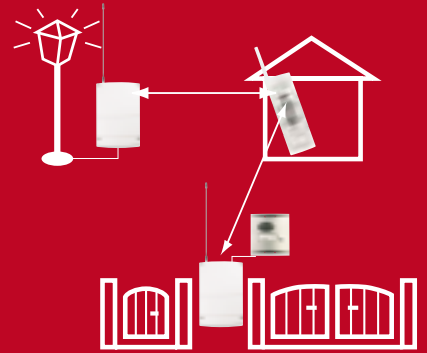

Current use:
Intercom, door control,
and powered gate control.
Potential to add external
light control.

A MODULAR OFFER



L5501GB: Standard intercom kit, single dwelling


- 1 Single button Caller Unit,
- 1 Controller,
- 1 Standard handset with mains recharging base unit,
- Instructions + batteries + screws & fitting accessories.

Your intercom as you want it.

All elements of the LOGISTY intercom are separately available: you can design your intercom system according to your needs and according to the profile of your building. You can include in your system as many handsets as you wish: extremely convenient for large houses, buildings with several floors or for houses with multiple occupants...



Capability to add multiple handsets.

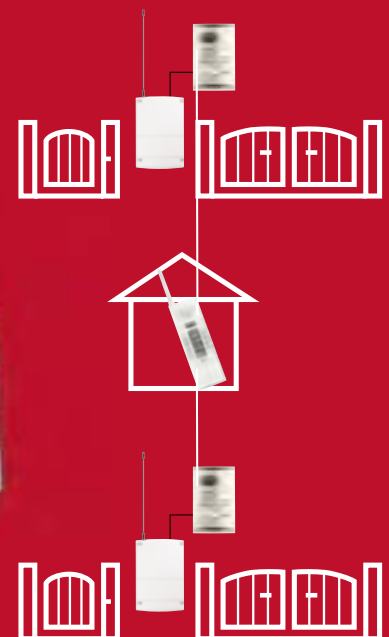

Capability to manage 2 separated entrances.



Interchangeable inserts are available in different colours.