

## A3 METAL REMOTE TRANSMITTER CLONE / COPY INSTRUCTIONS


The new A series metal finish transmitters are a compact, strong, modern and stylish remote control with cloning technology incorporated to replace your existing fixed code 433MHZ gate or garage door remotes. (Rolling or Hopping codes cannot be copied by this device)

The front cover closes to avoid any accidental transmitting and unnecessary battery consumption.

The transmitters will have been pre-programmed with a random 10 dip code. If you do not need to copy from another remote, you can learn any of these codes to the radio receiver device of your door or gate. (You will need your device documentation for this procedure)

### To copy a code from another transmitter follow these instructions:


1) Press buttons 1 & 2 on the new remote together until the LED flashes blue, this may take 20 seconds. Once the LED flashes you may let go, the remote is now in programming mode and it will stay in programming mode until you exit.

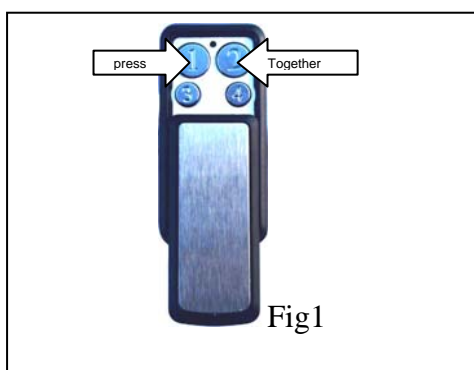

2) Press and hold the button that you want to programme, the LED briefly flashes once.



3) While you are still holding the new button down, press and hold your old remote button and approach the new remote very close. When the code is picked up, the blue LED flashes steady. This may take 20 seconds in some cases. Repeat only steps 2& 3 to programme more buttons if you have them.

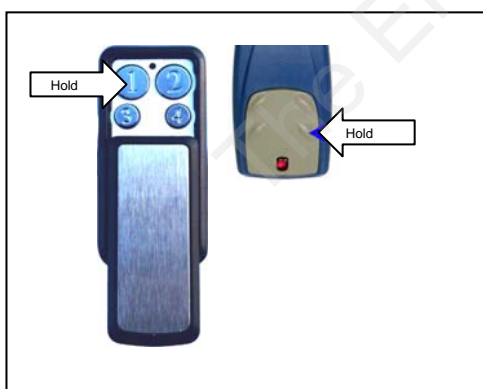

4) You must exit the programming to complete the operation by pressing and holding buttons 3 & 4. together, when the LED flashes steady the remote has exited the programming and is now ready for use.

